

Данные о продуктовой линейке LUMILUX T5 HE

Трубчатые люминесцентные лампы T5 High Efficiency, цоколь G5



- Public buildings Offices Shops Supermarkets and department stores Industry Outdoor applications only in suitable luminaires

- Good economy and efficiency Up to 20 % more economical than LUMILUX T8 Up to 50 % smaller volume than comparable T8 lamps



Данные о продуктовой линейке

Technical data

Описание продукта	Электрические параметры				Фотометрические данные		
	ZLDV_Nominal voltage [AGGR]	ZLDV_Nominal wattage [AGGR]	ZLDV_Rated wattage [AGGR]	ZLDV_Nominal current [AGGR]	ZLDV_Color rendering index Ra [AGGR]	ZLDV_Rated luminous flux [AGGR]	ZLDV_Light color [AGGR]
HE 14 W/830 ¹⁾	86 V	13.90 W	13.90 W	0.17 A	≥80	1350 lm	830
HE 14 W/840 ¹⁾				0.17 A A			
HE 21 W/830 ¹⁾				0.17 A A			
HE 21 W/840 ¹⁾				0.17 A A			
HE 21 W/865 ¹⁾	220 V	21.00 W	20.60 W	0.17 A A	≥80	1750 lm	865
HE 28 W/830 ¹⁾				0.17 A A			
HE 28 W/840 ¹⁾				0.17 A A			
HE 35 W/830 ¹⁾				0.18 A A			
HE 35 W/840 ¹⁾				0.18 A A			

Описание продукта	Электрические параметры				Размеры и вес		
	ZLDV_Rated color temperature [AGGR]	ZLDV_Nominal luminous flux [AGGR]	ZLDV_Light color (designation) [AGGR]	ZLDV_Color temperature [AGGR]	ZLDV_Tube diameter [AGGR]	ZLDV_Length [AGGR]	ZLDV_Diameter [AGGR]
HE 14 W/830 ¹⁾	3000 K	1350 lm	LUMILUX Warm White	3000 K	16 mm	563.2 mm	16.0 mm
HE 14 W/840 ¹⁾			LUMILUX Cool White		16 mm		
HE 21 W/830 ¹⁾			LUMILUX Warm White		16 mm		
HE 21 W/840 ¹⁾			LUMILUX Cool White		16 mm		
HE 21 W/865 ¹⁾	6500 K	1750 lm	LUMILUX Cool Daylight	6500 K	16 mm	849.0 mm	16.0 mm
HE 28 W/830 ¹⁾			LUMILUX Warm White		16 mm		
HE 28 W/840 ¹⁾			LUMILUX Cool White		16 mm		

Данные о продуктовой линейке

Описание продукта	ZLDV_Rated color temperature [AGGR]	ZLDV_Nominal luminous flux [AGGR]	ZLDV_Light color (designation) [AGGR]	ZLDV_Color temperature [AGGR]	Размеры и вес		
					ZLDV_Tube diameter [AGGR]	ZLDV_Length [AGGR]	ZLDV_Diameter [AGGR]
HE 35 W/830 ¹⁾			LUMILUX Warm White		16 mm		
HE 35 W/840 ¹⁾			LUMILUX Cool White		16 mm		

Описание продукта	ZLDV_Overall length [AGGR]	ZLDV_Outer bulb [AGGR]	ZLDV_Product weight [AGGR]	ZLDV_Base (standard designation) [AGGR]	ZLDV_Product remark [AGGR]	Дополнительные данные	
						Последующая модель EAN	Последующая модель EAN
HE 14 W/830 ¹⁾	563.20 mm	T16	44.26 g	G5	Suitable for ECG operation only/Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464824	4050300591520
HE 14 W/840 ¹⁾	563.20 mm		44.26 g		Suitable for ECG operation only Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464688	4050300591384
HE 21 W/830 ¹⁾	863.20 mm		70.92 g		Suitable for ECG operation only Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464800	4050300591506

Данные о продуктовой линейке

Описание продукта	ZLDV_Overall length [AGGR]	ZLDV_Outer bulb [AGGR]	ZLDV_Product weight [AGGR]	Дополнительные данные			
				ZLDV_Base (standard designation) [AGGR]	ZLDV_Product remark [AGGR]	Последующая модель EAN	Последующая модель EAN
HE 21 W/840 ¹⁾	863.20 mm		70.92 g		Suitable for ECG operation only Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464701	4050300591407
HE 21 W/865 ¹⁾	863.20 mm	T16	71.00 g	G5	Suitable for ECG operation only/Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464626	4050300591322
HE 28 W/830 ¹⁾	1163.20 mm		88.02 g		Suitable for ECG operation only Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464787	4050300591483
HE 28 W/840 ¹⁾	1163.20 mm		88.02 g		Suitable for ECG operation only Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464725	4050300591421

Данные о продуктовой линейке

Описание продукта	ZLDV_Overall length [AGGR]	ZLDV_Outer bulb [AGGR]	ZLDV_Product weight [AGGR]	Дополнительные данные			
				ZLDV_Base (standard designation) [AGGR]	ZLDV_Product remark [AGGR]	Последующая модель EAN	Последующая модель EAN
HE 35 W/830 ¹⁾	1463.20 mm		116.45 g		Suitable for ECG operation only Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464763	4050300591469
HE 35 W/840 ¹⁾	1463.20 mm		116.45 g		Suitable for ECG operation only Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C	4050300464749	4050300591445



Описание продукта	Возможности / мощности	Сертификаты и Стандарты		Классификация	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	ZLDV_Dimmable [AGGR]	ZLDV_Energy consumption [AGGR]	ZLDV_Energy efficiency class [AGGR]	ZLDV_Order reference [AGGR]	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database
HE 14 W/830 ¹⁾	Yes	14 kWh/1000h	F	HE 14W/830	18-04-2022	4050300591520 4050300464824	In work
HE 14 W/840 ¹⁾		14.00 kWh/1000h	F		18-04-2022	4050300464688 4050300591384	In work
HE 21 W/830 ¹⁾		21.00 kWh/1000h	F		18-04-2022	4050300591506 4050300464800	In work
HE 21 W/840 ¹⁾		21.00 kWh/1000h	F		18-04-2022	4050300591407 4050300464701	In work

Данные о продуктовой линейке


Описание продукта	Возможности / мощности	Сертификаты и Стандарты		Классификация	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	ZLDV_Dimmable [AGGR]	ZLDV_Energy consumption [AGGR]	ZLDV_Energy efficiency class [AGGR]	ZLDV_Order reference [AGGR]	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database
HE 21 W/865 ¹⁾	Yes	23 kWh/1000h	F	HE 21W/865	18-04-2022	4050300464626 4050300591322	In work
HE 28 W/830 ¹⁾		29.00 kWh/1000h	F		18-04-2022	4050300591483 4050300464787	In work
HE 28 W/840 ¹⁾		29.00 kWh/1000h	F		18-04-2022	4050300591421 4050300464725	In work
HE 35 W/830 ¹⁾		35.00 kWh/1000h	F		18-04-2022	4050300591469 4050300464763	In work
HE 35 W/840 ¹⁾		35.00 kWh/1000h	F		18-04-2022	4050300591445 4050300464749	In work

¹⁾ Подходит только для режима с ЭПРА/Лампа рассчитана на температуру внутри светильника 30...40 °C; оптимальный световой поток достигается при 35 °C


Данные о продуктовой линейке

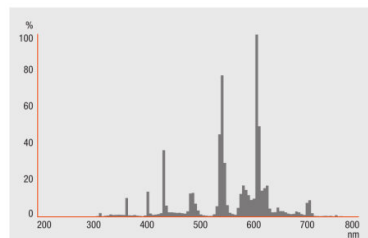

HE 14 W/830, HE 21 W/830, HE 28 W/830, HE 35 W/830

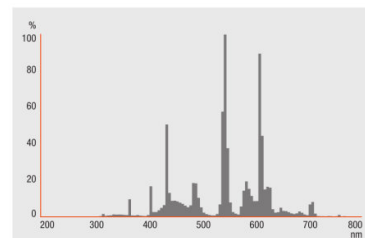

HE 14 W/840, HE 21 W/840, HE 28 W/840, HE 35 W/840

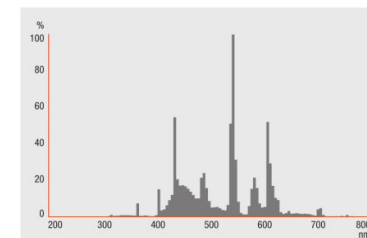

HE 21 W/865

Системная гарантия

Расширенная системная гарантия OSRAM в сочетании с ЭПРА OSRAM

Рекомендации по применению

Для получения дополнительной информации и изображения продукции, пожалуйста, ознакомьтесь с инструкцией.

Данные о продуктовой линейке

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Данные для заказа

Product code	Описание продукта	Упаковка (цена/шт.)	Размеры (длина x ширина x высота)	Объем	Вес брутто
4050300464824	HE 14 W/830	Shipping carton box 40	598 mm x 198 mm x 95 mm	11.25 дм ³	2340.00 g
4050300464688	HE 14 W/840	Shipping carton box 40	598 mm x 95 mm x 198 mm	11.25 дм ³	2580.00 g
4050300464800	HE 21 W/830	Shipping carton box 40	896 mm x 194 mm x 87 mm	15.12 дм ³	3962.00 g
4050300464701	HE 21 W/840	Shipping carton box 40	896 mm x 194 mm x 87 mm	15.12 дм ³	3962.00 g
4050300464626	HE 21 W/865	Shipping carton box 40	897 mm x 90 mm x 196 mm	15.82 дм ³	3673.20 g
4050300464787	HE 28 W/830	Shipping carton box 40	1200 mm x 94 mm x 194 mm	21.88 дм ³	4813.00 g
4050300464725	HE 28 W/840	Shipping carton box 40	1200 mm x 83 mm x 194 mm	19.32 дм ³	4813.00 g
4050300464763	HE 35 W/830	Shipping carton box 40	1500 mm x 93 mm x 194 mm	27.06 дм ³	6258.00 g
4050300464749	HE 35 W/840	Shipping carton box 40	1500 mm x 94 mm x 194 mm	27.35 дм ³	6258.00 g

Данные о продуктовой линейке

Данные для заказа

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Ссылки

Более подробную информацию по системной гарантии и положениям и условиям гарантийного обслуживания см. на странице [https://](https://www.inventronics-light.com/multilevel-guarantees)

▶ www.inventronics-light.com/multilevel-guarantees

Примечание

В заказ могут быть внесены изменения без предварительного уведомления. Проверьте информацию на наличие ошибок. Убедитесь, что информация актуальна.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany