

Техническое описание продукта HE 21 W/830

LUMILUX T5 HE | Трубчатые люминесцентные лампы T5 High Efficiency, цоколь G5



- Public buildings Offices Shops Supermarkets and department stores Industry Outdoor applications only in suitable luminaires

- Good economy and efficiency Up to 20 % more economical than LUMILUX T8 Up to 50 % smaller volume than comparable T8 lamps



Техническое описание продукта

Technical data

Электрические параметры

ZLDV_Nominal current [AGGR]	0.17 A A
-----------------------------	----------

Фотометрические данные

ZLDV_Luminous flux at 35 °C [AGGR]	2000 lm
ZLDV_Light color (designation) [AGGR]	LUMILUX Warm White
ZLDV_Rated LLMF at 2,000 h [AGGR]	0.95
ZLDV_Rated LLMF at 4,000 h [AGGR]	0.92
ZLDV_Rated LLMF at 6,000 h [AGGR]	0.91
ZLDV_Rated LLMF at 8,000 h [AGGR]	0.9
ZLDV_Rated LLMF at 12,000 h [AGGR]	0.9
ZLDV_Rated LLMF at 16,000 h [AGGR]	0.9
ZLDV_Rated LLMF at 20,000 h [AGGR]	0.89
ZLDV_Luminous flux [AGGR]	2000 lm

Размеры и вес



ZLDV_Tube diameter [AGGR]	16 mm
ZLDV_Length with base excl. base pins/connection [AGGR]	849,00 mm
ZLDV_Product weight [AGGR]	70.92 g
ZLDV_Overall length [AGGR]	863.20 mm

Срок службы

ZLDV_Service life [AGGR]	19000 h
--------------------------	---------

Дополнительные данные

ZLDV_Mercury content [AGGR]	1.5 mg
-----------------------------	--------

Техническое описание продукта

ZLDV_Product remark [AGGR]	Suitable for ECG operation only Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C
Утилизация по WEEE	Да
Последующая модель EAN	4050300591506
Последующая модель EAN	4050300464800


Сертификаты и Стандарты

ZLDV_Energy efficiency class [AGGR]	F
ZLDV_Energy consumption [AGGR]	21.00 kWh/1000h

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-04-2022
Primary Article Identifier	4050300591506 4050300464800
Declaration No. in SCIP database	In work

Распределение силы света

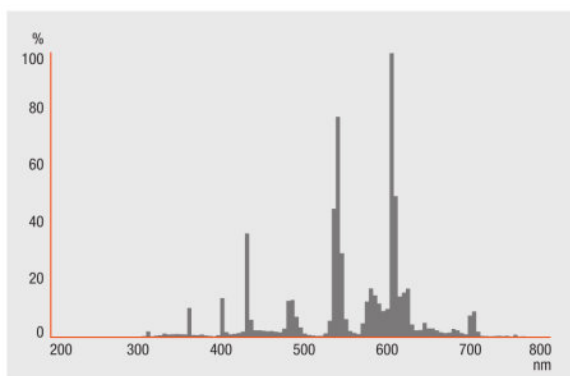


FL_830


Техническое описание продукта

Системная гарантия

Расширенная системная гарантия OSRAM в сочетании с ЭПРА OSRAM



QUICKTRONIC INTELLIGENT QT i 1x QTP 5 1x



QUICKTRONIC INTELLIGENT QT i 2x QTP 5 2x

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Данные для заказа

Product code	Описание продукта	Упаковка (цена/шт.)	Размеры (длина x ширина x высота)	Объем	Вес брутто
4050300464800	HE 21 W/830	Shipping carton box 40 шт. Unpacked	896 mm x 194 mm x 87 mm	15.12 дм ³	3962.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Ссылки

Более подробную информацию по системной гарантии и положениям и условиям гарантийного обслуживания см. на странице <https://>

▶ www.inventronics-light.com/multilevel-guarantees

Техническое описание продукта

Примечание

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

HE 21 W/830

LUMILUX T5 HE | Трубчатые люминесцентные лампы T5 High Efficiency, цоколь G5

Название продукта	Название продукта ЭПРА	EAN-код	Номинальный ток	Потери мощности	Световой поток при 35 °С	Число горелок
HE 21 W/830	QT-FIT 5 1x14-35	4008321971234	0.11 A	23.00 Вт	1900 лм	1
	QT-FIT 5 2x14-35	4008321971258	0.22 A	46.00 Вт	1900 лм	2
	QTi 1x14/24/21/39 GII	4008321383334	0.11 A	24.00 Вт	1900 лм	1
	QTi 1x28/54/35/49 GII	4008321383358	0.11 A	24.00 Вт	1900 лм	1
	QTi 1x35/49/80 GII	4008321383372	0.11 A	25.00 Вт	1900 лм	1
	QTi 2x14/24/21/39 GII	4008321383396	0.20 A	45.00 Вт	1900 лм	2
	QTi 2x21/39 DIM	4050300870694	0.21 A	45.00 Вт	1900 лм	2
	QTi 2x28/54/35/49 GII	4008321383419	0.20 A	45.00 Вт	1900 лм	2
	QTi 2x35/49/80 GII	4008321658951	0.23 A	49.00 Вт	2000 лм	2
	QTP5 1x14-35	4008321329035	0.11 A	24.00 Вт	1900 лм	1
QTP5 2x14-35	4008321329073	0.20 A	45.00 Вт	1900 лм	2	