

Техническое описание продукта

L 36 W/830

LUMILUX T8 | Трубчатые люминесцентные лампы трубчатой формы диаметром 26мм с цоколем **G13**



Техническое описание продукта

Technical data

Электрические параметры

ZLDV_Nominal wattage [AGGR]	36.00 W
ZLDV_Rated lamp efficacy (HF data 25 °C) [AGGR]	Under clarification by authority and standardization body
ZLDV_Rated wattage [AGGR]	36.00 W
ZLDV_Nominal current [AGGR]	0.43 A A

Фотометрические данные

ZLDV_Rated lamp efficacy (standard condition) [AGGR]	93 lm/W
ZLDV_Color rendering index Ra [AGGR]	≥80
ZLDV_Rated luminous flux [AGGR]	3350 lm
ZLDV_Luminous flux at 25 °C [AGGR]	3350 lm
ZLDV_Light color [AGGR]	830
ZLDV_Rated color temperature [AGGR]	3000 K
ZLDV_Nominal luminous flux [AGGR]	3350 lm
ZLDV_Light color (designation) [AGGR]	LUMILUX Warm White
ZLDV_Rated LLMF at 2,000 h [AGGR]	0.96
ZLDV_Rated LLMF at 4,000 h [AGGR]	0.94
ZLDV_Rated LLMF at 6,000 h [AGGR]	0.93
ZLDV_Rated LLMF at 8,000 h [AGGR]	0.91
ZLDV_Rated LLMF at 12,000 h [AGGR]	0.91
ZLDV_Rated LLMF at 16,000 h [AGGR]	0.90
ZLDV_Rated LLMF at 20,000 h [AGGR]	0.89
ZLDV_Color temperature [AGGR]	3000 K
ZLDV_Luminous flux [AGGR]	3350 lm

Размеры и вес



Техническое описание продукта

ZLDV_Tube diameter [AGGR]	26 mm
ZLDV_Length [AGGR]	1200 mm
ZLDV_Length with base excl. base pins/connection [AGGR]	1200.00 mm
ZLDV_Diameter [AGGR]	26.0 mm
ZLDV_Product weight [AGGR]	149.00 g
ZLDV_Outer bulb [AGGR]	T26
ZLDV_Overall length [AGGR]	1213.60 mm
ZLDV_Maximum diameter [AGGR]	26.0 mm

Температуры и условия управления

ZLDV_Rated ambient temp.w.max.luminous flux [AGGR]	25.0 °C
--	---------

Срок службы

ZLDV_Service life [AGGR]	18000 h ¹⁾
ZLDV_Lifespan [AGGR]	20000 h ¹⁾
ZLDV_Rated lamp survival factor at 2,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 4,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 6,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 8,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 12,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 16,000 h [AGGR]	0.99
ZLDV_Rated lamp survival factor at 20,000 h [AGGR]	0.50
ZLDV_Operation mode LLMF/LSF [AGGR]	HF
ZLDV_Rated lamp life time [AGGR]	20000 h

¹⁾ With preheat ECG

Дополнительные данные

ZLDV_Base (standard designation) [AGGR]	G13
ZLDV_Mercury content [AGGR]	2.5 mg
Утилизация по WEEE	Да
Последующая модель EAN	4050300517896
Последующая модель EAN	4050300443324

Возможности / мощности

ZLDV_Dimmable [AGGR]	Yes
ZLDV_Suitable for indoor [AGGR]	Yes

Сертификаты и Стандарты

--	--

Техническое описание продукта

ZLDV_Energy efficiency class [AGGR]	G
ZLDV_Energy consumption [AGGR]	43 kWh/1000h


Классификация

ZLDV_Order reference [AGGR]	L 36W/830
-----------------------------	-----------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	19-01-2022
Primary Article Identifier	4050300443324 4050300517896
Declaration No. in SCIP database	In work

Распределение силы света

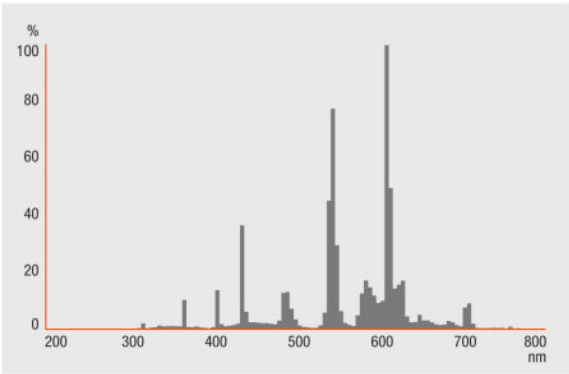


FL_830

Системная гарантия

Расширенная системная гарантия OSRAM в сочетании с ЭПРА OSRAM

Техническое описание продукта

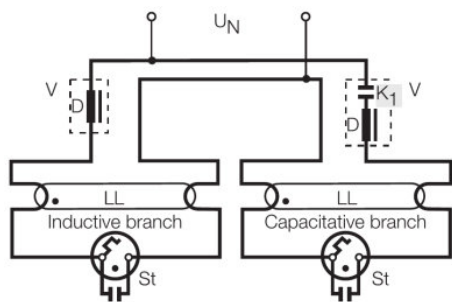

DUO CIRCUIT

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Данные для заказа

Product code	Описание продукта	Упаковка (цена/шт.)	Размеры (длина x ширина x высота)	Объем	Вес брутто
4050300517896	L 36 W/830	Shipping carton box 25 шт. Sleeves	144 mm x 147 mm x 1242 mm	26.29 дм³	5535.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Ссылки

Более подробную информацию по системной гарантии и положениям и условиям гарантийного обслуживания см. на странице <https://www.inventronics-light.com/multilevel-guarantees>

▶ www.inventronics-light.com/multilevel-guarantees

Более подробную информацию по электронному ПРА QUICKTRONIC см. на странице

▶ www.osram.com/QUICKTRONIC

Техническое описание продукта

Примечание

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

L 36 W/830

LUMILUX T8 | Трубчатые люминесцентные лампы трубчатой формы диаметром 26мм с цоколем G13

Название продукта	Название продукта ЭПРА	EAN-код	Номиналь ный ток	Потери мощности	Световой поток при 35 °C	Число горелок
L 36 W/830	QT-FIT 5/8 1x18-39	4008321873927	0.16 A	37.00 Вт	3200 лм	1
	QT-FIT 5/8 2x18-39	4008321873903	0.31 A	70.00 Вт	3200 лм	2
	QT-FIT8 1x36	4008321294203	0.16 A	36.00 Вт	3200 лм	1
	QT-FIT8 2x36	4008321294265	0.32 A	71.00 Вт	3200 лм	2
	QT-FIT8 3x36	4008321512055	0.48 A	105.00 Вт	3500 лм	3
	QTi 1x14/24/21/39 GII	4008321383334	0.09 A	35.00 Вт	3350 лм	1
	QTi 2x14/24/21/39 GII	4008321383396	0.31 A	70.00 Вт	3200 лм	2
	QT-M 2x26-42/220-240 S	4008321110022	0.30 A	70.00 Вт	3200 лм	2
	QTP-DL 2x36-40	4008321117922	0.35 A	80.50 Вт	3400 лм	2
	QTP-M 1x26-42	4008321329134	0.16 A	35.00 Вт	3350 лм	1
	QTP-OPTIMAL 1x18-40	4008321873743	0.16 A	36.00 Вт	3200 лм	1
	QTP-OPTIMAL 2x18-40	4008321873767	0.30 A	71.00 Вт	3200 лм	2
	QTz8 1x36	4008321863287	0.16 A	36.00 Вт	3200 лм	1
	QTz8 2x36	4008321863324	0.32 A	71.00 Вт	3200 лм	2