

PL-LIN-Z6 4000-950 560X20-LV

PrevaLED Linear G6 CRI90 | Линейные модули



Характеристики продукта

- В наличии со световым потоком: 2 200 лм или 4 000 лм на 560 мм

Преимущества продукта

- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation

Области применения

- Office
- Промышленность



Техническое описание продукта

Technical data

Электрические параметры

Номинальное напряжение	43,2 В
Номинальный ток	0,6 А
Тип тока	Постоянный ток
On-mode power [AGGR]	26.50 Вт
Energy consumption in on-mode [AGGR]	26.5 кВт·ч/1000 ч

Фотометрические данные

Световая отдача	158 лм/Вт
Индекс цветопередачи Ra	90
Correlated color temperature CCT [AGGR]	5000 К
Colour consistency (McAdam ellipses) [AGGR]	3
Useful luminous flux (Φuse) [AGGR]	4055 лм


Светотехнические параметры

Время зажигания	< 0,1 s
Время разогрева (60 %)	< 2,00 s

— Информация о светодиодном модуле

Количество светодиодов в модуле	96
---------------------------------	----

Размеры и вес



Вес продукта	40,00 g
Height EPREL [AGGR]	5.0 mm
Length EPREL [AGGR]	560.0 mm
Width EPREL [AGGR]	20.0 mm

Техническое описание продукта

Температуры и условия управления

Предел раб.темпер.согласно IEC 62717	50 °C
Диапазон температур в процессе работы	-20...75 °C
Макс.температура в контрольной точке tc	75 °C
t хранения	-30...85 °C
Диапазон температуры окружающей среды	-20...+75 °C

Срок службы

Количество циклов переключения	100000
Lumen maintenance factor LMF [AGGR]	96
L70B50 lifetime [AGGR]	100000 h

Дополнительные данные

Lighting technology used [AGGR]	LED
Последующая модель EAN	4052899985483

Сертификаты и Стандарты

Стандарты	CE/ENEC/VDE
Тип защиты	IP20
Energy efficiency class [AGGR]	D

Условия поставки

Код заказа	85414100000
------------	-------------


Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-04-2022
Primary Article Identifier	4052899606876
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

Техническое описание продукта



484525_5 Year Osram Guarante
(GB)

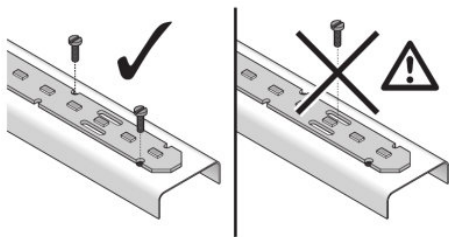

PL LIN G5 G6 Mounting Guidance 251021

Текст спецификации

- When parallel wiring, tolerance-related differences in output are possible and may cause deviations in brightness.

Загрузка данных

Файл	
	Certificates PL ENEC 40031612 250723
	Declarations of conformity PL LIN Z6 CE 3812352 090823
	Declarations of conformity EU Declaration of conformity PL-LIN-Z4 family
	Declarations of conformity Declaraton of conformity PL-LIN-Z4
	CAD data 3-dim PL LIN Z5 Z6 4000 560x20 LV CADPDF 240220

Техническое описание продукта

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Данные для заказа

Product code	Описание продукта	Упаковка (цена/шт.)	Размеры (длина x ширина x высота)	Объем	Вес брутто
4052899606876	PL-LIN-Z6 4000-950 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 дм³	2838.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Примечание

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.